

CSAH 10

16 A 250 V

size **49.16****10 poles +** 


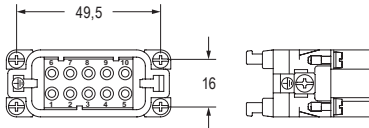
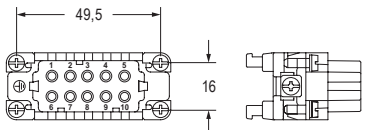
Tool-less connection – SQUICH®

EN 61984 rating	16 A 250 V 4 kV 3
	16 A 400 V 4 kV 2
Rated voltage (UL / CSA)	600 V
Insulation resistance	$\geq 10 \text{ G}\Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Ambient temperature limit	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK ENEC




 ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Dimension
	Male inserts with male contacts Spring clamp connections, with actuator button	CSAHM 10	
	Female inserts with female contacts Spring clamp connections, with actuator button	CSAHF 10	

Materials

Insert	polycarbonate (PC)
UL 94 flame rating	V-0
Colour	pebble grey, RAL 7032
Contacts	built-in, copper alloy, silver • plated

Wiring information

Wires cross sectional area	
- unprepared	0,14 mm ² - 2,5 mm ² (AWG 26-14)
- prepared	up to 1,5 mm ² (AWG 16)
Stripping length	9...11 mm

Enclosures size 49.16

Pages

Heavy-Duty Applications

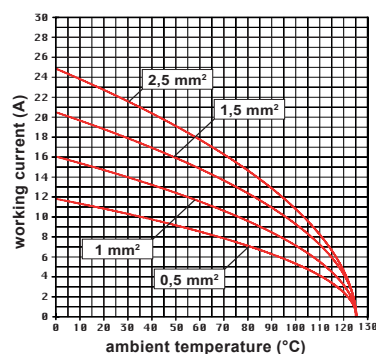
Metallic with IL-BRID lever	E.14-15
Metallic with JEI®-P lever	E.18
Metallic with Rigid IP67 lever	E.26

Aggressive Environments

Metallic W-TYPE	E.28-29
Metallic E-Xtreme®	E.34-35

Specialized Applications

EMC (Electromagnetic Shielding)	E.40-41
COB system for switch cabinet	E.290



CSAH 10 inserts max. current load derating diagram