



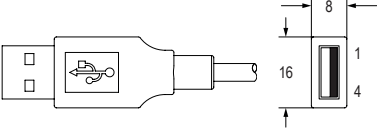



CUK
USB adapter

size **21.21**
1 seat for USB connector

Ambient temperature limit -25 °C ... +80 °C

US ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	L(m)	Dimension
	Female insert with USB 2.0 female-female coupler	CUK 2FT		
	Female insert with USB 3.0 female-female coupler	CUK 3FT		
	Patch cable USB-A/USB-A Patch cable USB-A/USB-A	CW 2 UAM CW 5 UAM	2 5	 

Materials

Insert	polycarbonate (PC)
UL 94 flame rating	V-0
Colour	white, RAL 7035

Compact 21.21 enclosures	Pages
Heavy-Duty Applications	
Thermoplastic	A.46-48,51-52*
Thermoplastic with metal lever	A.53-55
Metallic	A.56-63,65-66*
Aggressive Environments	
Metallic IP68 high protection	A.78-81
Specialized Applications	
Hygienic series for food and beverage	A.94-96*

* male inserts without gasket compatible only with hoods with glued gasket, **DESINA**® version

Inserts already supplied with stainless steel fixing screw with gasket, which ensures IP66/IP67/IP69 degree of protection