

CX 01 U




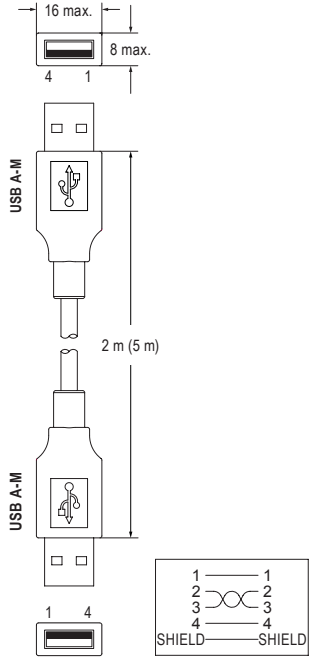
1 A 50 V

size **1 module****USB connectors**

EN 61984 rating	1 A 50 V 0,8 kV 3
Insulation resistance	$\geq 10 \text{ G}\Omega$
Contact resistance	$\leq 3 \text{ m}\Omega$
Ambient temperature limit	-25 °C ... +80 °C



CAUS ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Dimension
	Male insert without USB male connector (patch-cord to be ordered separately)	CX 01 UM	
	Female insert with USB 2.0 female-female coupler	CX 01 UF	
	Patch-cord USB-A/USB-A, 2 m Patch-cord USB-A/USB-A, 5 m	CW 2 UAM CW 5 UAM	

Materials

Insert	polycarbonate (PC)
UL 94 flame rating	V-0
Colour	pebble grey, RAL 7032

Accessories**Pages****MIXO Frames**

Metal frames for modular units	C.94-95
Thermoplastic docking frames	C.98-101

Enclosures

Insulating MIXO holder	C.103
MIXO ONE	C.106-107
MIXO TWO	C.110-111