

JEI®-P series

size **57.27**

Housings and hoods – 2 levers – with gasket


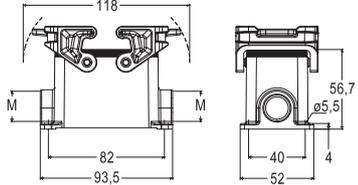
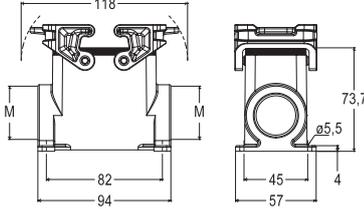

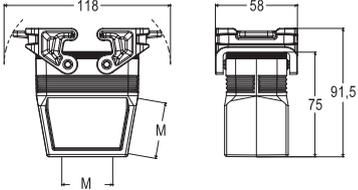
Heavy-Duty Applications 

CE UK

EN 60529	IP65
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

 (pending CQC)

 ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	JPI 10		
	Surface mounting housings, 2 levers and gasket	JMPP 10.20 JMPP 10.220	M20 M20 × 2	
	Surface mounting housings, 2 levers and gasket, high construction To be used only with a complete cable gland	JMPAP 10.25 JMPAP 10.225 JMPAP 10.32 JMPAP 10.232 JMPAP 10.40 JMPAP 10.240	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2	
	Hoods, 2 levers and gasket, top entry	Top entry JMPV 10 G25	M25	
	Hoods, 2 levers and gasket, side or top entry, high construction To be used only with a complete cable gland	Side entry Top entry JMPFV 10 G25 JMPFV 10 G32 JMPFO 10 G40 JMPFV 10 G40	M25 M32 M40	

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages		
CNE	16 A	10 + ⊕	B.39	CT / CTSE*	16 A	10 + ⊕	B.127,131
CCE	16 A	10 + ⊕	B.45	CMCE / CMSH	16 A	3 + 2 (aux.) + ⊕	B.144,149
CSH / JSH S	16 A	10 + ⊕	B.53,59	CX	40 A/10 A	8/24 + ⊕	B.170-171
CSHT	16 A	10 + ⊕	B.66	*can be used only in bulkhead mounting housings			
CQE / CQEY	16 A	18 + ⊕	B.73,83	MIXO Modular Inserts			
CDD	10 A	42 + ⊕	B.95	Pages			
CDSH	10 A	18 + ⊕	B.103	MIXO modules			C.12-93
CSS	16 A	10 + ⊕	B.119	CX 03 T (3-slot sized MIXO frames)			C.95

Complete with:



Hoods
Page E.57,61



Covers
Page E.60