

V-TYPE series – IP67 version

Housings – 2 levers – with gasket

size **77.27**
**Heavy-Duty
Applications**


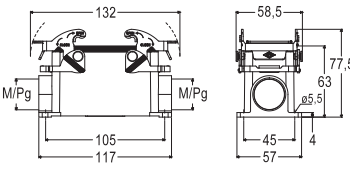

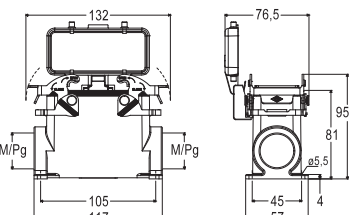

CE UK



EN 60529	IP65 / IP66 / IP67 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	With cover	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket, with or without metal cover Optional mounting frame C7 .. FL is available to ensure water tightness for bulkhead mounting housing when fitted onto a cabinet panel. (See page G.45)	C7I 16	C7I 16 S		
	Surface mounting housings, 2 levers and gasket	M7P 16 25 M7P 16 L225 C7P 16 C7P 16.2		M25 M25 x 2 Pg 21 Pg 21 x 2	
	Surface mounting housings, 2 levers and gasket, high construction, with or without metal cover	M7AP 16.32 M7AP 16.232 M7AP 16.40 M7AP 16.240 C7AP 16.21 C7AP 16.221 C7AP 16.29 C7AP 16.229	M7AP 16 S32 M7AP 16 S232	M32 M32 x 2 M40 M40 x 2 Pg 21 Pg 21 x 2 Pg 29 Pg 29 x 2	

Inserts size 77.27	Poles	Pages	Inserts size 77.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE 16 A	16 + ⊕	B.40	CP / CPY 35 A	6 + ⊕	B.112,114	MIXO modules	C.12-93
CCE 16 A	16 + ⊕	B.46	CSS 16 A	16 + ⊕	B.120	CX 04 T (4-slot sized MIXO frames)	C.95
CSH / JSH S 16 A	16 + ⊕	B.54,60	CT / CTSE* 16 A	16 + ⊕	B.128,132		
CSHT 16 A	16 + ⊕	B.67	CT / CTS* 10 A	40 + ⊕	B.138,140		
CQE / CQEY 16 A	32 + ⊕	B.74,84	CMCE / CMSH 16 A	6 + 2 (aux.) + ⊕	B.145,150		
CQEE 16 A	40 + ⊕	B.78	CX / CXC 80 A/16 A	4/0, 4/2 + ⊕	B.158-160		
CD 10 A	40 + ⊕	B.90	CX 40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ⊕	B.163-164, 168-169		
CDD 10 A	72 + ⊕	B.94					
CDSH 10 A	27 + ⊕	B.104					

*can be used only in bulkhead mounting housings

Complete with:


Hoods
 Page E.65,69

BIG Hoods
 Page E.270

Covers
 Page E.68