

C-TYPE series


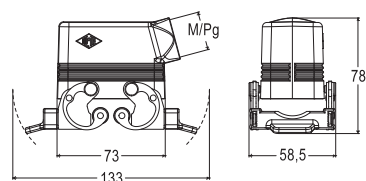

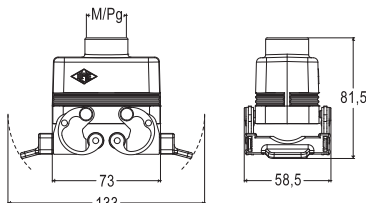

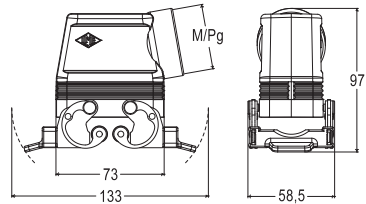

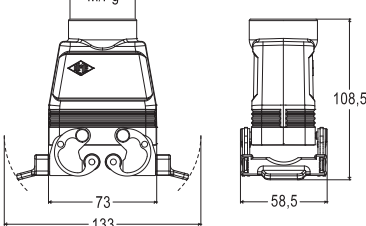
Hoods - 2 levers - without gasket

size **57.27**
Heavy-Duty Applications




EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

 ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 2 levers, without gasket, side entry	MHO 10 X20 MHO 10 X25 CHO 10 X		M20 M25 Pg 16	
	Hoods, 2 levers, without gasket, top entry To be used only with a complete cable gland		MHV 10 X20 MHV 10 X25 CHV 10 X	M20 M25 Pg 16	
	Hoods, 2 levers, without gasket, side entry, high construction	MAO 10 X32 MAO 10 X40 CAO 10 X CAO 10 X29		M32 M40 Pg 21 Pg 29	
	Hoods, 2 levers, without gasket, top entry, high construction		MAV 10 X32 MAV 10 X40 CAV 10 X CAV 10 X29	M32 M40 Pg 21 Pg 29	

C-TYPE

E

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages		
CNE	16 A	10 + ⊕	B.39	CMCE / CMSH	16 A	3 + 2 (aux.) + ⊕	B.144,149
CCE	16 A	10 + ⊕	B.45	CX	40 A/10 A	8/24 + ⊕	B.170-171
CSH / JSH S	16 A	10 + ⊕	B.53,59				
CSHT	16 A	10 + ⊕	B.66				
CQE / CQEY	16 A	18 + ⊕	B.73,83				
CDD	10 A	42 + ⊕	B.95				
CDSH	10 A	18 + ⊕	B.103				
CSS	16 A	10 + ⊕	B.119				
				MIXO Modular Inserts		Pages	
				MIXO modules		C.12-93	
				CX 03 T (3-slot sized MIXO frames)		C.95	

Accessories:

CHCP 10
Dust protection cover
Page G.46