

# Central lever series

## Housings and hoods with 2 pegs for central levers

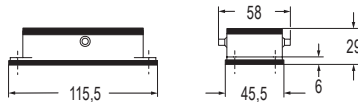
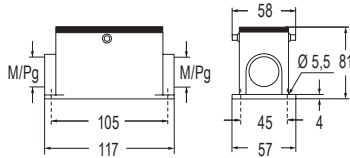
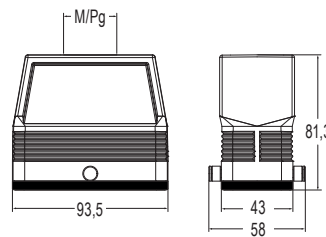
size **77.27**Heavy-Duty  
Applications

|                            |                    |
|----------------------------|--------------------|
| EN 60529                   | IP65               |
| UL 50 / UL 50E             | Type 12 / 4 / 4X   |
| Ambient temperature limits | -40 °C ... +125 °C |
| Mechanical life (cycles)   | ≥ 500              |

CE UK



ECBT2.E115072 | ECBT8.E115072

| Item                                                                                | Description                                                                                                     | Part No.                                                                                                                                                     | Entry                               | Dimension                                                                             |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|---------------------------------------------------------------------------------------|
|    | Bulkhead mounting housings,<br>2 pegs and gasket                                                                | <a href="#">CHI 16 YC</a>                                                                                                                                    |                                     |    |
|   | Surface mounting housings,<br>2 pegs and gasket,<br>high construction, 2 entries                                | <a href="#">MAP 16 YC232</a><br><a href="#">CAP 16 YC229</a>                                                                                                 | M32 × 2<br>Pg 29 × 2                |    |
|  | Hoods, top entry, 2 pegs<br>and gasket, high construction<br><br>To be used only with a complete<br>cable gland | <a href="#">MFV 16 GYC25</a><br><a href="#">MFV 16 GYC32</a><br><a href="#">MFV 16 GYC40</a><br><a href="#">CFV 16 GYC21</a><br><a href="#">CFV 16 GYC29</a> | M25<br>M32<br>M40<br>Pg 21<br>Pg 29 |  |

| Inserts size 77.27 | Poles | Pages          | Inserts size 77.27 | Poles     | Pages                                            | MIXO Modular Inserts               | Pages   |
|--------------------|-------|----------------|--------------------|-----------|--------------------------------------------------|------------------------------------|---------|
| CNE                | 16 A  | 16 + ☉ B.40    | CP / CPY           | 35 A      | 6 + ☉ B.112,114                                  | MIXO modules                       | C.12-93 |
| CCE                | 16 A  | 16 + ☉ B.46    | CSS                | 16 A      | 16 + ☉ B.120                                     | CX 04 T (4-slot sized MIXO frames) | C.95    |
| CSH / JSH S        | 16 A  | 16 + ☉ B.54,60 | CT / CTSE*         | 16 A      | 16 + ☉ B.128,132                                 |                                    |         |
| CSHT               | 16 A  | 16 + ☉ B.67    | CT / CTS*          | 10 A      | 40 + ☉ B.138,140                                 |                                    |         |
| CQE / CQEY         | 16 A  | 32 + ☉ B.74,84 | CMCE / CMSH        | 16 A      | 6 + 2 (aux.) + ☉ B.145,150                       |                                    |         |
| CQEE               | 16 A  | 40 + ☉ B.78    | CX / CXC           | 80 A/16 A | 4/0, 4/2 + ☉ B.158-160                           |                                    |         |
| CD                 | 10 A  | 40 + ☉ B.90    |                    |           |                                                  |                                    |         |
| CDD                | 10 A  | 72 + ☉ B.94    | CX                 | 40 A/10 A | 6/12, 6/36, 9/42 and 12/2 + ☉ B.163-164, 168-169 |                                    |         |
| CDSH               | 10 A  | 27 + ☉ B.104   |                    |           |                                                  |                                    |         |

\*can be used only in bulkhead mounting housings