

LS-TYPE series – Light and Sound


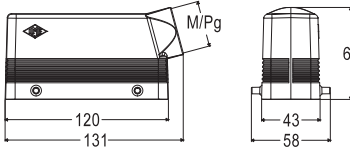



Housings, hoods and covers – 4 pegs – without gasket

size **104.27**Specialized
Applications

EN 60529	IP65
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +90 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 4 pegs, without gasket	CHIN 24 CH		
	Hoods, side entry, 4 pegs, without gasket	Side entry MHON 24.32	M32	
	Hoods, top entry, 4 pegs, without gasket	Top entry MHVN 24.32	M32	
	Hoods, side or top entry, 4 pegs, high construction, without gasket To be used only with a complete cable gland	Side entry MFON 24.32 Top entry MFVN 24.32	M32	
	Covers, 4 pegs, without gasket For enclosures with 2 levers and gasket with eyelet for housings 	CHCN 24		

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CT / CTSE*	16 A	24 + ☉ B.129,133	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CT / CTS*	10 A	64 + ☉ B.139,141		
CSHT	16 A	24 + ☉ B.68	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151		
CQE / CQEY	16 A	46 + ☉ B.75,85	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CQEE	16 A	64 + ☉ B.79	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CD	10 A	64 + ☉ B.91	*can be used only in bulkhead mounting housings				
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					