



# IP68 high protection – CGK / MGK

## Housings and hoods – Screw locking

size **21.21**Aggressive  
Environments

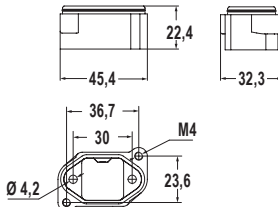
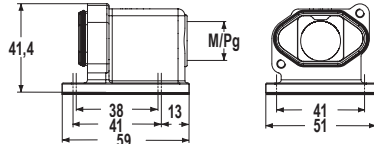
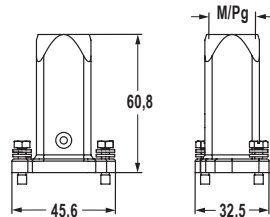
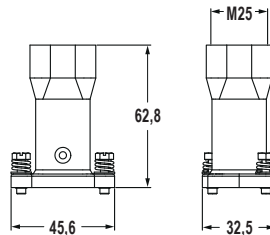
CE UK



|                            |                    |
|----------------------------|--------------------|
| EN 60529                   | IP66 / IP68 / IP69 |
| UL 50 / UL 50E             | Type 12 / 4 / 4X   |
| Ambient temperature limits | -40 °C ... +125 °C |
| Mechanical life (cycles)   | ≥ 500              |



ECBT2.E115072 | ECBT8.E115072

| Item                                                                                | Description                                                                                                               | Part No.                                                                             | Entry          | Dimension                                                                             |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|----------------|---------------------------------------------------------------------------------------|
|    | Bulkhead mounting housings, screw locking                                                                                 | <a href="#">CGK I</a>                                                                |                |    |
|    | Angled bulkhead mounting housings, with cable entry, bottom closed, screw locking<br><br>Without cable entry (on request) | <a href="#">MGK IAP20</a><br><a href="#">CGK IAP13</a><br><br><a href="#">CGK IA</a> | M20<br>Pg 13,5 |   |
|  | Hoods, top entry, screw locking<br>Not suitable for CQ4 series inserts                                                    | <a href="#">MGK V20</a><br><a href="#">CGK V13</a>                                   | M20<br>Pg 13,5 |  |
|  | Hoods, top entry, screw locking                                                                                           | <a href="#">MGK V25</a>                                                              | M25            |  |

| Compact 21.21 Inserts | Poles         | Pages   |
|-----------------------|---------------|---------|
| CQ4 / CQ / CQY        | 40 A to 6,5 A | A.4-12  |
| CK / JK / CKSH        | 10 A          | A.16-19 |
| CD / CDY              | 10 A          | A.24-25 |
| CJ (RJ45)             | 1 A to 2,1 A  | A.30-33 |
| CUK (USB)             | –             | A.36    |
| CX (BUS)              | 10 A          | A.37    |
| CLK (Fibre optics)    | –             | A.38    |

**Notes:**

Eliminate the gasket and the fixing screw; provided with the insert. To fix the insert, use the screw with gasket provided with the enclosure.

**Accessories:**

**CGKCP FX**  
Dust protection  
cover  
Page G.47



**CGKCP MB**  
Dust protection  
cover  
Page G.47