

W-TYPE series

Hoods and covers – 4 pegs – without gasket

size **104.27**
**Aggressive
Environments**

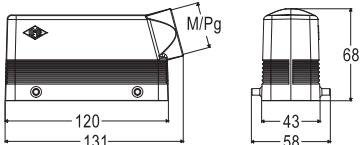
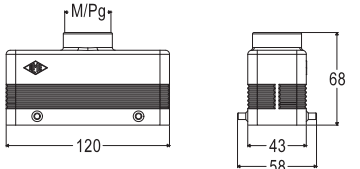
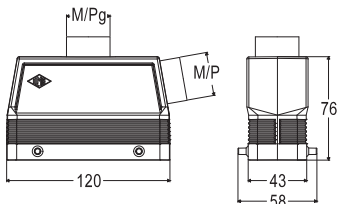
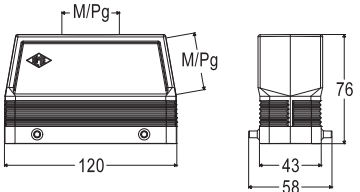



CE UK



EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 4 pegs, without gasket, side entry	MHOW 24.25 MHOW 24.32 CHOW 24		M25 M32 Pg 21	
	Hoods, 4 pegs, without gasket, top entry To be used only with a complete cable gland		MHVW 24.25 MHVW 24.32 CHVW 24	M25 M32 Pg 21	
	Hoods, 4 pegs, without gasket, side or top entry, high construction	MAOW 24.32 MAOW 24.40 CAOW 24.29	MAVW 24.32 MAVW 24.40 CAVW 24.29	M32 M40 Pg 29	
	Hoods, 4 pegs, without gasket, side or top entry, high construction To be used only with a complete cable gland	MFOW 24.32 MFOW 24.40	MFWV 24.32 MFWV 24.40	M32 M40	
	Covers, 4 pegs, without gasket For enclosures with 2 levers and gasket with loop for hoods  or with eyelet for housings 	With loop CHCW 24 S	With eyelet CHCW 24		

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CSHT	16 A	24 + ☉ B.68	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CQE / CQEY	16 A	46 + ☉ B.75,85					
CQEE	16 A	64 + ☉ B.79					
CD	10 A	64 + ☉ B.91					
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					

Accessories:


CHCP 24
Dust protection
cover
Page G.46