

EMC series

Hoods and covers – 4 pegs – without gasket

size **104.27**Specialized
Applications

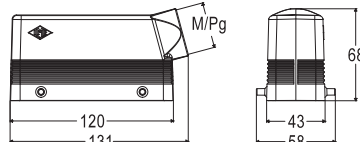

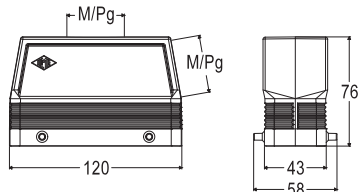


CE UK



EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 4 pegs, without gasket, side entry	MHOS 24.25 MHOS 24.32 CHOS 24		M25 M32 Pg 21	
	Hoods, 4 pegs, without gasket, top entry To be used only with a complete cable gland		MHVS 24.25 MHVS 24.32 CHVS 24	M25 M32 Pg 21	
	Hoods, 4 pegs, without gasket, side or top entry, high construction To be used only with a complete cable gland	MFOS 24.32 MFOS 24.40 CFOS 24.29	MFVS 24.32 MFVS 24.40 CFVS 24.29	M32 M40 Pg 29	
	Covers, 4 pegs, without gasket For enclosures with 2 levers and gasket with loop for hoods  or with eyelet for housings 	With loop CHCS 24 S	With eyelet CHCS 24		

Inserts size 104.27	Poles	Pages
CNE	16 A	24 + ☺ B.41
CCE	16 A	24 + ☺ B.47
CSH / JSH S	16 A	24 + ☺ B.55,61
CSHT	16 A	24 + ☺ B.68
CQE / CQEY	16 A	46 + ☺ B.75,85
CQEE	16 A	64 + ☺ B.79
CD	10 A	64 + ☺ B.91
CDD	10 A	108 + ☺ B.97
CDSH	10 A	42 + ☺ B.105

Inserts size 104.27	Poles	Pages
CSS	16 A	24 + ☺ B.121
CMCE / CMSH	16 A	10 + 2 (aux.) + ☺ B.146,151
CX	100 A/16 A	8/0 and 6/6 + ☺ B.156-157
CX / CXC	80 A/16 A	4/8 + ☺ B.161-162

MIXO Modular Inserts	Pages
MIXO modules	C.12-93
CX 06 T (6-slot sized MIXO frames)	C.95

Accessories:



CHCP 24
Dust protection
cover
Page G.46