

W-TYPE series

Hoods – 2 pegs – without gasket

size **104.62**
**Aggressive
Environments**

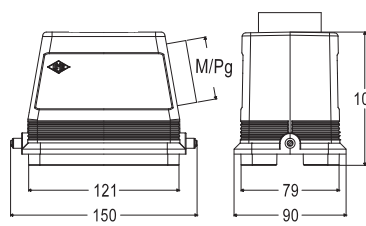
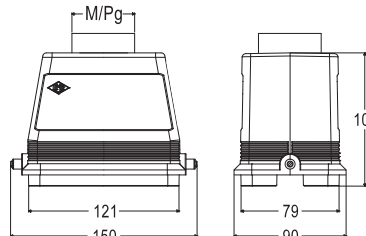
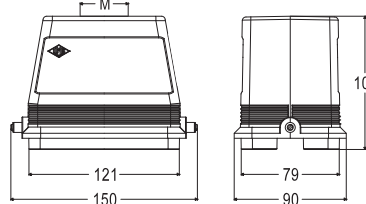

CE UK



EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 2 pegs, without gasket, side entry, with metal adapter	MHOW 48 L40 CHOW 48 L		M40 Pg 36	
	Hoods, 2 pegs, without gasket, top entry, with metal adapter		MHVW 48 L40 CHVW 48 L	M40 Pg 36	
	Hoods, 2 pegs, without gasket, top entry		MFVW 48 L63	M63	

W-TYPE

E

Inserts size (104.27) × 2	Poles	Pages	Inserts size (104.27) × 2	Poles	Pages
CNE	16 A	48 + ☉ B.43	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.148,153
CCE	16 A	48 + ☉ B.49			
CSH / JSH S	16 A	48 + ☉ B.57,63			
CQE / CQEY	16 A	92 + ☉ B.77,87			
CD	10 A	128 + ☉ B.93			
CDD	10 A	216 + ☉ B.99			
CDSH	10 A	84 + ☉ B.107			
CSS	16 A	48 + ☉ B.123			
			MIXO Modular Inserts		
			MIXO modules		C.12-93
			CX 06 T (6-slot sized MIXO frames) × 2		C.95