

Metallic – CKA / MKA – DESINA®

size **21.21**

Hoods and covers – 2 pegs


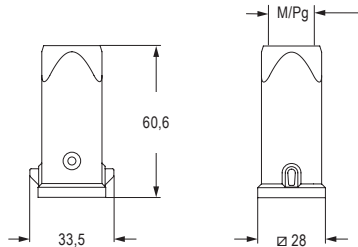


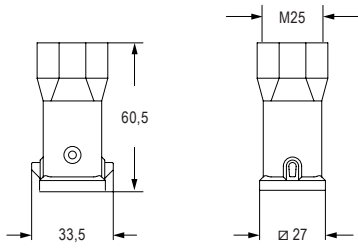


**Heavy-Duty
Applications**


EN 60529	IP44
With CKR 65	IP66 / IP67 / IP69
UL 50 / UL 50E	Type 12
With CKR 65	Type 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Hoods, 2 pegs and glued gasket, side entry DESINA® version	MKAG VA20 CKAG 03 VA	M20 Pg 11	
	Hoods, 2 pegs and glued gasket, top entry DESINA® version	MKAG V20 CKAG 03 V	M20 Pg 11	
	Hoods, 2 pegs and glued gasket, side entry DESINA® version	MKAG VA25	M25	
	Hoods, 2 pegs and glued gasket, top entry DESINA® version	MKAG V25	M25	
	Covers, 2 pegs and glued gasket DESINA® version For hoods with 1 lever with eyelet 	CKAG 03 C		

Compact 21.21 Inserts	Poles	Pages
CJ (RJ45)	1 A to 2,1 A	A.30-33
CUK (USB)	–	A.36
CX (BUS)	10 A	A.37
CLK (Fibre optics)	4	A.38

DESINA® version: suitable for DESINA® CJ, CUK, CLK, CX BD adapters for male inserts without gasket