

## E-Xtreme® – CKAE / MKAE

size 21.21

## Housings – 1 lever


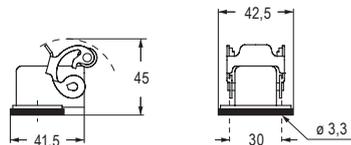
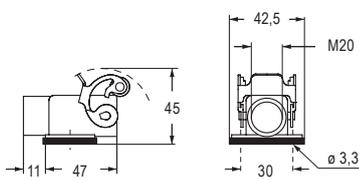
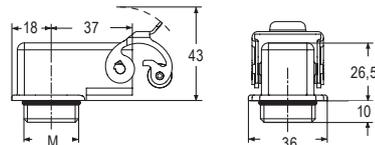

2 000 hrs resistance  
in salt-spray testsAggressive  
Environments

EN 60529	IP44
With CKR 65	IP66 / IP67 / IP69
UL 50 / UL 50E	Type 12
With CKR 65	Type 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

CE UK



CFLUS ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 1 stainless steel lever	<a href="#">CKAXE 03 I</a>		
	Angled bulkhead mounting housings, 1 stainless steel lever  Not suitable for CQ4 series inserts	<a href="#">CKAXE 03 IA</a>		
 	Angled bulkhead mounting housings, 1 stainless steel lever, with cable entry, open or closed bottom flange  Not suitable for CQ4 series inserts	Open bottom flange <a href="#">MKAXE IAP20</a>  Closed bottom flange <a href="#">MKAXE AP20</a>	M20  M20	
	Angled bulkhead mounting housings, 1 stainless steel lever, with fixing thread  Not suitable for CQ4 series inserts	<a href="#">MKAXE IAF20</a> <a href="#">MKAXE IAF25</a>	M20 M25	
	Hoods, 1 stainless steel lever, top entry  Not suitable for CQ4 series inserts	<a href="#">MKAXE VG20</a>	M20	

Compact 21.21 Inserts	Poles	Pages
CQ4 / CQ / CQY	40 A to 6,5 A	A.4-12
CK / JK / CKSH	10 A	A.16-19
CD / CDY	10 A	A.24-25

Note: to obtain the IP66 / IP67 / IP69 degree of protection it is necessary to replace the fixing screw supplied with all inserts, with the one with gasket included in the CKR 65 kit, to be purchased separately, except for the inserts listed below (already supplied with a fixing screw with gasket):

- CQF/M 07, CQF/M 12

## Accessories:



**CKR 65**  
gasket and screw kits for  
IP66 / IP67 / IP69  
Page A.67