



180 °C series – Heat shield enclosures

Housings and hoods – 1 lever

size **21.21**Specialized
Applications






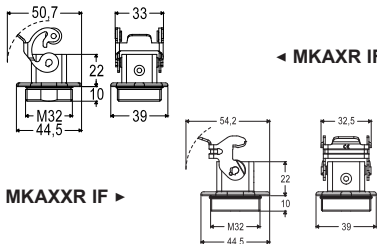
CE UK

DNV BUREAU
VERITAS

EN 60529	IP44
UL 50 / UL 50E	Type 12
Ambient temperature limits	-40 °C ... +180 °C
Mechanical life (cycles)	≥ 500

cURus

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 1 stainless steel lever	CKAXR 03 I		
	Angled bulkhead mounting housings, 1 stainless steel lever	CKAXR 03 IA		
	Angled bulkhead mounting housings, 1 stainless steel lever, with cable entry	With gasket MKAXR IAP20 Without gasket MKAXR AP20	M20 M20	
	Hood, 1 stainless steel lever, top entry	MKAXR VG20	M20	
	Bulkhead mounting housings, with 1 stainless steel lever or with 1 stainless steel rigid lever, with M32 fixing thread CQC, DNV, BV and cURus pending only for MKAXXR IF	With stainless steel lever MKAXR IF With stainless steel rigid lever MKAXXR IF	M32 M32	

Inserts size 21.21	Poles	Pages
CK 03 RY 10 A	3 + ⊕	I.4
CK 04 RY 10 A	4 + ⊕	I.4