

IL-BRID series

Hoods – 1 lever – with gasket

size **77.27**
**Heavy-Duty
Applications**


CE UK

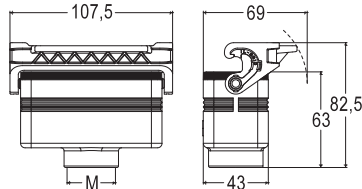
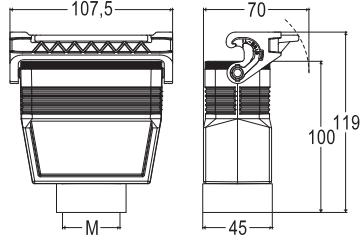
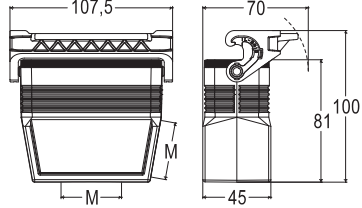
EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



(pending CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 1 lever and gasket, top entry		MLV 16 LG32	M32	
	Hoods, 1 lever and gasket, top entry, high construction, with metal adapter		MLAV 16 LG25 MLAV 16 LG32 MLAV 16 LG40	M25 M32 M40	
	Hoods, 1 lever and gasket, side or top entry, high construction To be used only with a complete cable gland	MLFO 16 LG40	MLFV 16 LG25 MLFV 16 LG32 MLFV 16 LG40	M25 M32 M40	

IL-BRID

E

Inserts size 77.27	Poles	Pages
CNE	16 A	16 + ☉ B.40
CCE	16 A	16 + ☉ B.46
CSH / JSH S	16 A	16 + ☉ B.54,60
CSHT	16 A	16 + ☉ B.67
CQE / CQEY	16 A	32 + ☉ B.74,84
CQEE	16 A	40 + ☉ B.78
CD	10 A	40 + ☉ B.90
CDD	10 A	72 + ☉ B.94
CDSH	10 A	27 + ☉ B.104

Inserts size 77.27	Poles	Pages
CP / CPY	35 A	6 + ☉ B.112,114
CSS	16 A	16 + ☉ B.120
CMCE / CMSH	16 A	6 + 2 (aux.) + ☉ B.145,150
CX / CXC	80 A/16 A	4/0, 4/2 + ☉ B.158-160
CX	40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ☉ B.163-164, 168-169

MIXO Modular Inserts	Pages
MIXO modules	C.12-93
CX 04 T (4-slot sized MIXO frames)	C.95

Complete with:


Hoods
Page E.63

Covers
Page E.68