

IL-BRID series

Hoods – 1 lever – with gasket

size **104.27**
**Heavy-Duty
Applications**

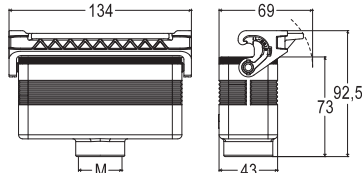
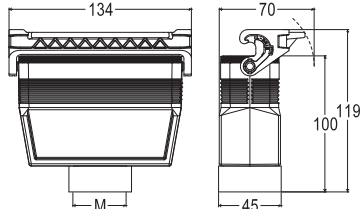
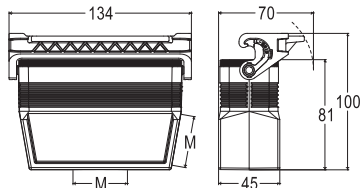
CE UK


(pending CQC)



ECBT2.E115072 | ECBT8.E115072

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 1 lever and gasket, top entry		MLV 24 LG32	M32	
	Hoods, 1 lever and gasket, top entry, high construction, with metal adapter		MLAV 24 LG25 MLAV 24 LG32 MLAV 24 LG40	M25 M32 M40	
 	Hoods, 1 lever and gasket, side or top entry, high construction To be used only with a complete cable gland	MLFO 24 LG40	MLFV 24 LG25 MLFV 24 LG32 MLFV 24 LG40	M25 M32 M40	

IL-BRID

E

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CSHT	16 A	24 + ☉ B.68	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CQE / CQEY	16 A	46 + ☉ B.75,85					
CQEE	16 A	64 + ☉ B.79					
CD	10 A	64 + ☉ B.91					
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					

Complete with:


Hoods
Page E.71

Covers
Page E.76