

IL-BRID series

Hoods – 2 levers – without gasket

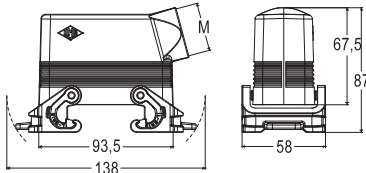
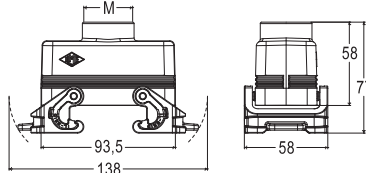
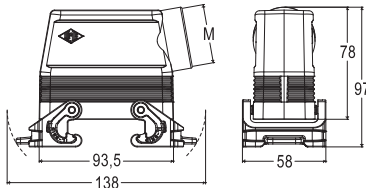
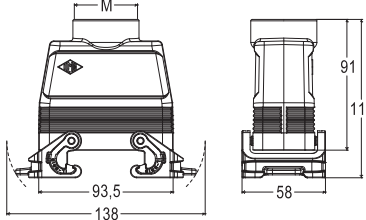
size **77.27**
**Heavy-Duty
Applications**


CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Hoods, 2 levers, without gasket, side entry	MLO 16 X25 MLO 16 X32	M25 M32	
	Hoods, 2 levers, without gasket, top entry	MLV 16 X25 MLV 16 X32	M25 M32	
	Hoods, 2 levers, without gasket, side entry, high construction	MLAO 16 X32 MLAO 16 X40	M32 M40	
	Hoods, 2 levers, without gasket, top entry, high construction	MLAV 16 X32 MLAV 16 X40	M32 M40	

Inserts size 77.27	Poles	Pages	Inserts size 77.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	16 + ☉ B.40	CP / CPY	35 A	6 + ☉ B.112,114	MIXO modules	C.12-93
CCE	16 A	16 + ☉ B.46	CSS	16 A	16 + ☉ B.120	CX 04 T (4-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	16 + ☉ B.54,60	CMCE / CMSH	16 A	6 + 2 (aux.) + ☉ B.145,150		
CSHT	16 A	16 + ☉ B.67	CX / CXC	80 A/16 A	4/0, 4/2 + ☉ B.158-160		
CQE / CQEY	16 A	32 + ☉ B.74,84					
CQEE	16 A	40 + ☉ B.78	CX	40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ☉ B.163-164, 168-169		
CD	10 A	40 + ☉ B.90					
CDD	10 A	72 + ☉ B.94					
CDSH	10 A	27 + ☉ B.104					

Complete with:


Housings
Page E.66

Covers
Page E.68