

Slim enclosures – W-TYPE series

Housings and covers – 1 lever

size **66.16**

Aggressive Environments

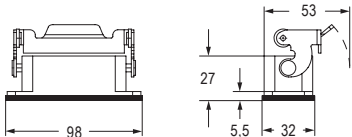
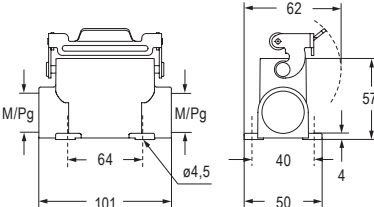



CE UK
CA



EN 60529	IP65 / IP66 / IP67 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

UL[®] **US** ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 1 stainless steel rigid lever, without gasket	CZ7IW 25 L		
	Surface mounting housings, 1 stainless steel rigid lever, without gasket	MZ7PW 25L225 CZ7PW 25 L2	M25 × 2 Pg 16 × 2	
	Cover, 1 stainless steel rigid lever, without gasket Covers cannot be used together with metal coding pins For enclosures with 2 pegs and gasket with loop for hoods 	CZ7CW 25 LG		

Inserts size 66.16		Poles	Pages
CDA	16 A	16 + ☹	B.17
CDC	16 A	16 + ☹	B.20
CSAH	16 A	16 + ☹	B.25
CD	10 A	25 + ☹	B.31
CDD	10 A	38 + ☹	B.33