

Slim enclosures – E-Xtreme®

size **49.16**

Hoods and covers – 2 pegs

2 000 hrs resistance
in salt-spray tests



Aggressive
Environments





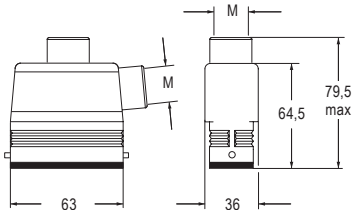

CE UK



EN 60529	IP65 / IP66 / IP67 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 2 pegs and gasket, side entry	MZOE 15 L20 MZOE 15 L25		M20 M25	
	Hoods, 2 pegs and gasket, top entry		MZVE 15 L20	M20	
	Hoods, 2 pegs and gasket, side or top entry, high construction, with metal adapter	MZAQE 15 L25	MZAVE 15 L25	M25	
	Cover, 2 pegs and gasket For enclosures with 1 lever without gasket with eyelet for housings 		With eyelet CZCE 15 L		

Inserts size 49.16		Poles	Pages
CDA	16 A	10 + ⊕	B.16
CDC	16 A	10 + ⊕	B.19
CSAH	16 A	10 + ⊕	B.24
CD	10 A	15 + ⊕	B.30

MIXO Modular Inserts		Pages
MIXO modules		C.12-93
CX 01 T (1-slot sized MIXO frames)		C.94