



HNM series – High Number of Mating cycles

size **104.27**

Hoods – 2 anti-friction pegs – without gasket


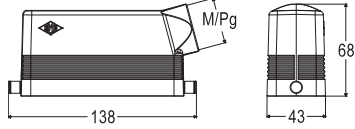

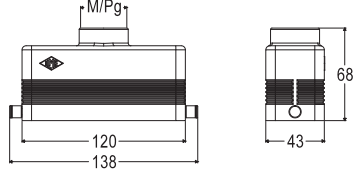

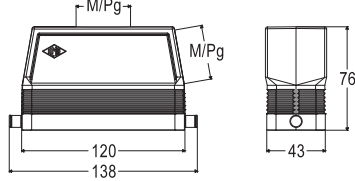

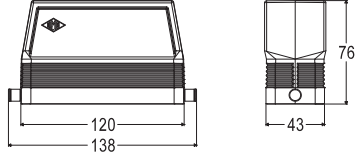
Specialized Applications

CE UK

DNV BUREAU VERITAS

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 10 000

CAIUS ECBT2.E115072 | ECBT8.E115072


Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 2 pegs, without gasket, side entry	RHO 24 L32		M32	
	Hoods, 2 pegs, without gasket, top entry		RHV 24 L32	M32	
	Hoods, 2 pegs, without gasket, side or top entry, high construction	RFO 24 L40	RFV 24 L40	M40	
	Hoods, 2 pegs, without gasket, high construction, designed to be drilled	Without entry	RAC 24 L		

STANDARD 104.27

H

Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
RCE 16 A	24 + ⊕	H.13	MIXO HNM modules	H.38-60
RSH 16 A	24 + ⊕	H.17	RX 06 T (6-slot sized MIXO HNM frames)	H.62
RQEE 16 A	64 + ⊕	H.19		
RD 10 A	64 + ⊕	H.21		
RDD 10 A	108 + ⊕	H.25		
RDSH 10 A	42 + ⊕	H.29		
RXC 80 A / 16 A	4/8 + ⊕	H.31		

Accessories:



CR 24 DF
Self-centring floating frame HNM
Page H.64