



HNM series – High Number of Mating cycles

Housings – 1 lever – with gasket

size **77.27**Specialized
Applications

CE UK


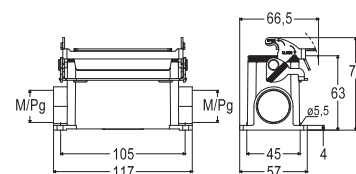
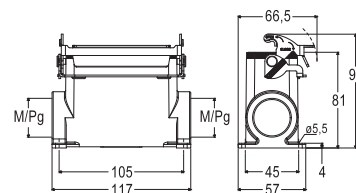
DNV BUREAU
VERITAS

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 10 000

CFLUS

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
------	-------------	----------	-------	-----------

Bulkhead mounting housings,
1 lever and gasket[RVI 16 L](#)Surface mounting housings,
1 lever and gasket[RVP 16 L25](#)
[RVP 16 L225](#)M25
M25 x 2Surface mounting housings,
1 lever and gasket,
high construction[RVAP 16 L32](#)
[RVAP 16 L232](#)M32
M32 x 2

Inserts size 77.27		Poles	Pages	MIXO Modular Inserts	Pages
RCE	16 A	16 + ⊕	H.12	MIXO HNM modules	H.38-60
RSH	16 A	16 + ⊕	H.16	RX 04 T (4-slot sized MIXO HNM frames)	H.62
RQEE	16 A	40 + ⊕	H.18		
RD	10 A	40 + ⊕	H.20		
RDD	10 A	72 + ⊕	H.24		
RDSH	10 A	27 + ⊕	H.28		
RXC	80 A / 16 A	4/2 + ⊕	H.30		
RX	40 A / 10 A	12/2 + ⊕	H.32		

Accessories:**CR 16 DF**
Self-centring floating
frame HNM
Page H.64