

T-TYPE Hygienic series – Food and Beverage

size **104.27**

T-TYPE/H Housings and hoods for production lines

T-TYPE/C Housings and hoods for low-temperatures

Specialized
Applications

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 – Type 4 / 4X Indoor Use Only
Ambient temperature limits	T-TYPE/H: -40 °C ... +70 °C T-TYPE/C: -50 °C ... +70 °C
Mechanical life (cycles)	≥ 500



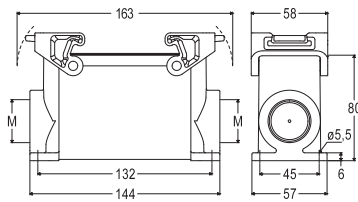
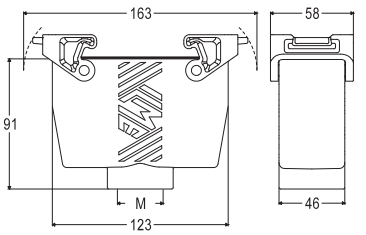
CE UK



(pending: CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	T-TYPE/H	T-TYPE/C	Entry	Dimension
	Bulkhead mounting housings, 2 levers - HNBR gasket for T-TYPE/H - SILICONE gasket for T-TYPE/C	THIH 24	THIC 24		
	Surface mounting housings, 2 levers, high construction - HNBR gasket for T-TYPE/H - SILICONE gasket for T-TYPE/C Supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).	TAPH 24.32 TAPH 24.40	TAPC 24.32 TAPC 24.40	M32 M40	
	Hoods, 2 levers and gasket, top entry, high construction - HNBR gasket for T-TYPE/H - SILICONE gasket for T-TYPE/C	TAVH 24 G32 TAVH 24 G40	TAVC 24 G32 TAVC 24 G40	M32 M40	

T-TYPE/H and T-TYPE/C

E

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CSHT	16 A	24 + ☉ B.68	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CQE / CQEY	16 A	46 + ☉ B.75,85					
CQEE	16 A	64 + ☉ B.79					
CD	10 A	64 + ☉ B.91					
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					

Complete with:

Hoods
Page E.233Covers
Page E.235PE jumpers
(Optional)
Page E.249