


T-TYPE series – Insulating

size **104.27**

T-TYPE Housings and hoods for Heavy-Duty Applications
 T-TYPE/W Housings and hoods for Aggressive Environments


Aggressive Environments 




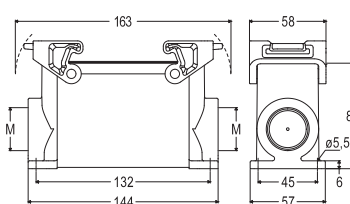

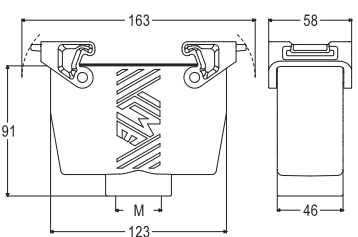
Heavy-Duty Applications 

EN 60529	T-TYPE: IP65 T-TYPE/W: IP65 / IP66 / IP69
UL 50 / UL 50E	T-TYPE: Type 12 T-TYPE/W: Type 12 – Type 4 / 4X Indoor Use Only
Ambient temperature limits	-40 °C ... +90 °C
Mechanical life (cycles)	≥ 500

CE UK

 (pending: CQC)

 ECBT2.E115072 | ECBT8.E115072


Item	Description	T-TYPE	T-TYPE/W	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket - PUR gasket for T-TYPE - FKM gasket for T-TYPE/W	TCHI 24	THIW 24		
	Surface mounting housings, 2 levers and gasket, high construction - PUR gasket for T-TYPE - FKM gasket for T-TYPE/W Supplied with an open threaded entry and diametrically opposite a closed threaded entry which can be opened by the user if required (with suitable tool).	TMAP 24.32 TMAP 24.40	TAPW 24.32 TAPW 24.40	M32 M40	
	Hoods, 2 levers and gasket, top entry, high construction - PUR gasket for T-TYPE - FKM gasket for T-TYPE/W	TMAV 24 G32 TMAV 24 G40	TAVW 24 G32 TAVW 24 G40	M32 M40	

T-TYPE and T-TYPE/W

E

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉	B.41	CSS	16 A	24 + ☉	B.121
CCE	16 A	24 + ☉	B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉	B.146,151
CSH / JSH S	16 A	24 + ☉	B.55,61	CX	100 A/16 A	8/0 and 6/6 + ☉	B.156-157
CSHT	16 A	24 + ☉	B.68	CX / CXC	80 A/16 A	4/8 + ☉	B.161-162
CQE / CQEY	16 A	46 + ☉	B.75,85				
CQEE	16 A	64 + ☉	B.79				
CD	10 A	64 + ☉	B.91				
CDD	10 A	108 + ☉	B.97				
CDSH	10 A	42 + ☉	B.105				

Accessories:

 **CR BPE**
PE jumpers
Page E.236