


# EMC shield clamps for 35 mm top hat DIN rails without strain relief

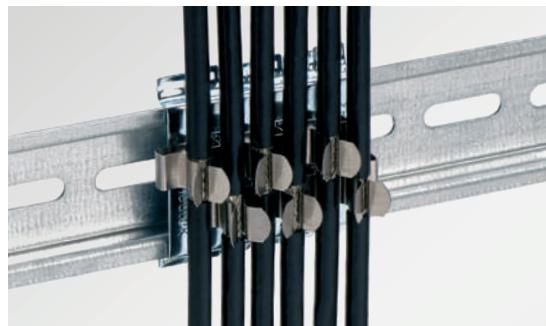

SFS|SKL

Whenever a cable shielding is required with the possibility of grounding, EMC shield clamps can be used. Shield clamps are easy to use and effective in dissipating conducted disturbances.

## Assembly

The shield clamps can be mounted on 35 mm top hat DIN rails.


## Advantages & benefits

- Large cable shield contact area
- Easy, tool-free assembly
- The spring design requires no adjustments and will permanently maintain contact to the cable shield
- Designed for high density applications
- Shock and vibration resistant, maintenance free

## Specifications

### Material

MSKL clamp, SKL clamp	Spring steel, zinc plated
SF/SFZ foot	Spring steel
SK bracket	Steel, galvanically zinc plated

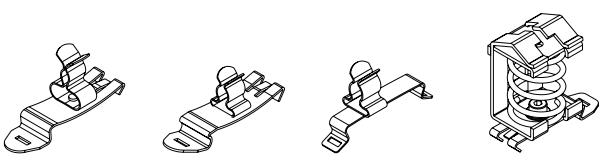

	SF-M MSKL	SF SKL	SFS SKL	SF SK
Clamping range	Order No.	Order No.	Order No.	Order No.
MSKL				
3 – 12 mm	37616	–	–	–
8 – 18 mm	37618	–	–	–
SKL				
1.5 – 3 mm	–	36243	36810	–
3 – 6 mm	–	36244	36815	–
6 – 8 mm		36245	36820	
8 – 11 mm	–	36246	–	–
SK				
11 – 17 mm	–	36247	–	–
17 – 22 mm	–	36248	–	–
22 – 30 mm	–	36249	–	–
30 – 38 mm	–	36250	–	–
38 – 48 mm	–	36252	–	–
SK				
3 – 8 mm	–	–	–	36500.002
4 – 13.5 mm	–	–	–	36502.002
10 – 20 mm	–	–	–	36504
15 – 32 mm	–	–	–	36506
PU	10	10	10	10

4

4.1

4.2

4.3

4.4