

QTMB

Split multi-range grommets,
large, for the QUICK system



The multi-range grommet QTMB is used to route pre-terminated cables into the KEL-QUICK system.

The innovative membrane enables the routing of cables with diameters that can vary up to 3 mm.

The QTMB can also be used to insert large cables with a clamping range of 14 to 29 mm.

Advantages & benefits

- Routing of cables with and without connectors
- IP54 rating
- Strain relief when a suitable cable entry is selected
- Large clamping range
- Only 7 grommets cover a clamping range from 14 to 29 mm
- Innovative wave cut for a better sealing
- Innovative membrane for high flexibility

Specifications

Material	Elastomer
Flame class	UL 94 V-0, self-extinguishing
IP rating	IP54
Temperature	-40°C to +100°C (static)
Properties	Halogen-free, silicone-free

Accessories

ST-B Plugs	171
------------	-----

Description	Type	Compatible plugs	Order No.	Clamping range	PU
	QTMB 14–17	ST-B 16	42515	14–17 mm	10
	QTMB 16–19	ST-B 18	42516	16–19 mm	10
	QTMB 18–21	ST-B 20	42517	18–21 mm	10
	QTMB 20–23	ST-B 22	42518	20–23 mm	10
	QTMB 22–25	ST-B 24	42519	22–25 mm	10
	QTMB 24–27	ST-B 26	42520	24–27 mm	10
	QTMB 26–29	ST-B 28	42521	26–29 mm	10
	QTMB-BTG	–	42545	Blank grommet	10

i ST-B plugs for the sealing of the perforated membrane






ø 14 – 17 mm



ø 20 – 23 mm



ø 26 – 29 mm

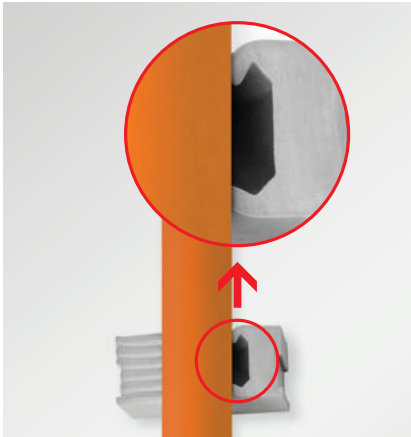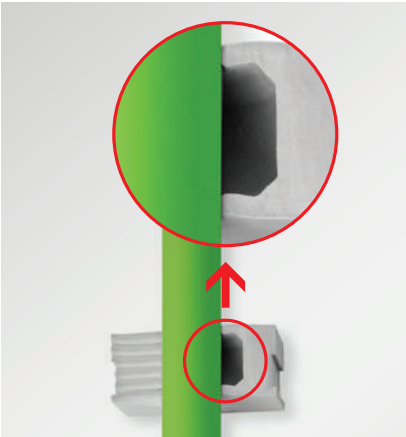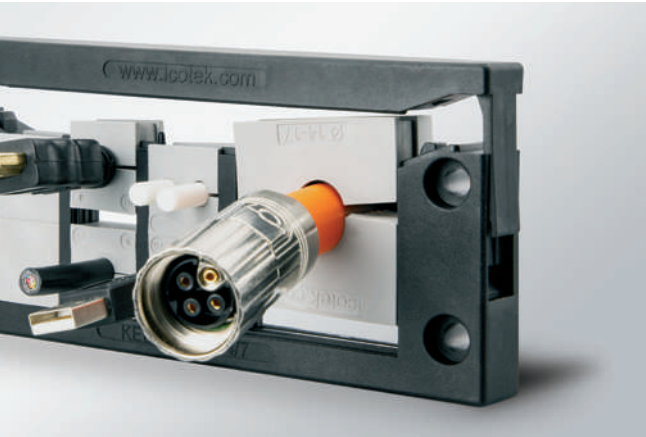

1
1.11
1.12
1.13
1.14
1.15
1.2
1.21
1.22
1.23
1.24
1.25
1.3