

UT-DT

Membrane cable grommet in U-shape, non-split

The UT-DT membrane cable grommet is used to route non-assembled cables. It can be used wherever the use of the UT cable grommets is possible. Its use allows the packing density of the routed cables to be increased. The wall thickness of the housing can range from 1.0 to 4.0 mm. It is used in various types of housings made from different materials. These include plastic, metal and die-cast aluminium housings.




Advantages


- Up to five cables can be routed with one grommet
- For housing wall thickness from 1 – 4 mm
- Easy, tool-free installation
- Cost-effective solution

Specifications

Material	Elastomer
Colour	■ grey (similar RAL 7035) ■ black
IP Protection	IP54 (certified acc. to EN 60529)
Flame class	UL 94 V-0, self-extinguishing
Temperature	-40°C to +100°C (static)
Properties	Silicone free, halogen free



	Type	Cable diameter	Colour	Order No.	PU
	UT-DT 1	1× max. 11 mm	■ grey	56020	10
	UT-DT 1	1× max. 11 mm	■ black	56120	10
	UT-DT 4	2× max. 6,4 mm 1× max. 4,2 mm 1× max. 3,2 mm	■ grey	56021	10
	UT-DT 4	2× max. 6,4 mm 1× max. 4,2 mm 1× max. 3,2 mm	■ black	56121	10
	UT-DT 5	3× max. 5,2 mm 2× max. 3,2 mm	■ grey	56022	10
	UT-DT 5	3× max. 5,2 mm 2× max. 3,2 mm	■ black	56122	10

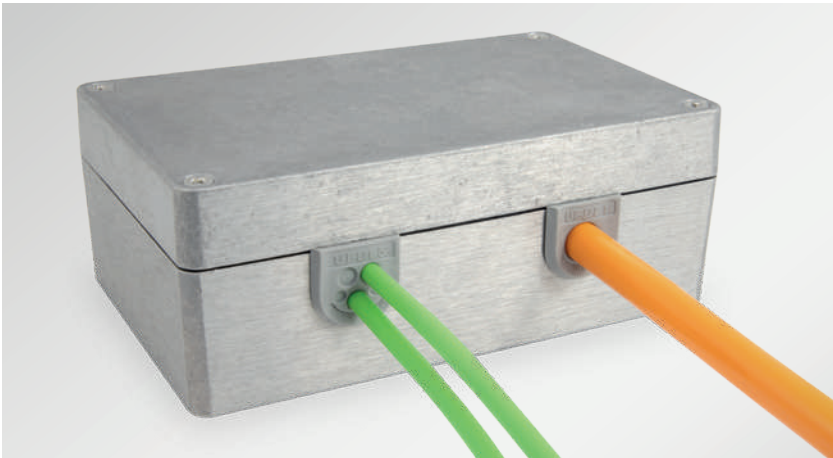

1

1.11

1.12

1.13

1.14

1.15

1.2

1.21

1.22

1.23

1.24

1.25

1.3