
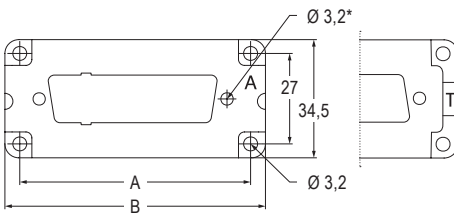
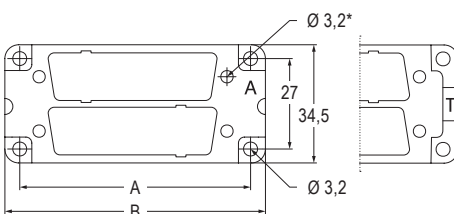


CR AD

D-SUB adapter plates

Item	Description	Part No.	Dimension												
	Adapter plates for D-Sub inserts for CZ/MZ/MZF enclosures: Size 49.16: 1×D-Sub insert 9 poles Size 49.16: 1×D-Sub insert 15 poles Size 49.16: 1×D-Sub insert 25 poles Size 66.16: 1×D-Sub insert 37 poles Size 66.16: 1×D-Sub insert 50 poles D-Sub inserts not included Use M3 passing screws tightened with nuts and washers (not included) One-way mounting in bulkhead housings or hoods.	CR 09 AD CR 15 AD CR 25 AD CR 37 AD CR 50 AD	 <table> <tr> <th>Part No.</th><th>A (mm)</th><th>B (mm)</th><th>* for pass-through M3 screws</th></tr> <tr> <td>CR 09/15/25 AD</td><td>49,5</td><td>56,5</td><td></td></tr> <tr> <td>CR 37/50 AD</td><td>66</td><td>73,5</td><td></td></tr> </table>	Part No.	A (mm)	B (mm)	* for pass-through M3 screws	CR 09/15/25 AD	49,5	56,5		CR 37/50 AD	66	73,5	
Part No.	A (mm)	B (mm)	* for pass-through M3 screws												
CR 09/15/25 AD	49,5	56,5													
CR 37/50 AD	66	73,5													

	Adapter plates for D-Sub inserts for CH/MH/CA/MA/MF enclosures: Size 44.27: 1×D-Sub insert 9 poles Size 44.27: 1×D-Sub insert 15 poles Size 57.27: 1×D-Sub insert 25 poles Size 77.27: 1×D-Sub insert 37 poles Size 77.27: 1×D-Sub insert 50 poles	CR 09 AD1 CR 15 AD1 CR 25 AD1 CR 37 AD1 CR 50 AD1	 <table> <tr> <th>Part No.</th><th>A (mm)</th><th>B (mm)</th><th>* for pass-through M3 screws</th></tr> <tr> <td>CR 09/15 AD1</td><td>44</td><td>51,5</td><td></td></tr> <tr> <td>CR 25 AD1</td><td>57</td><td>64,5</td><td></td></tr> <tr> <td>CR 37/50 AD1</td><td>77,5</td><td>85</td><td></td></tr> </table>	Part No.	A (mm)	B (mm)	* for pass-through M3 screws	CR 09/15 AD1	44	51,5		CR 25 AD1	57	64,5		CR 37/50 AD1	77,5	85	
Part No.	A (mm)	B (mm)	* for pass-through M3 screws																
CR 09/15 AD1	44	51,5																	
CR 25 AD1	57	64,5																	
CR 37/50 AD1	77,5	85																	
	Adapter plates for D-Sub inserts for CH/MH/CA/MA/MF enclosures: Size 44.27: 2×D-Sub inserts 9 poles Size 44.27: 2×D-Sub inserts 15 poles Size 57.27: 2×D-Sub inserts 25 poles Size 77.27: 2×D-Sub inserts 37 poles Size 77.27: 2×D-Sub inserts 50 poles D-Sub inserts not included Use M3 passing screws tightened with nuts and washers (not included) Mounting on bulkhead housings The D-Sub connector must be mounted on the side marked with the letter "A" Mounting on hoods The D-Sub connector must be mounted on the side marked with the letter "T"	CR 09 AD2 CR 15 AD2 CR 25 AD2 CR 37 AD2 CR 50 AD2	 <table> <tr> <th>Part No.</th><th>A (mm)</th><th>B (mm)</th><th>* for pass-through M3 screws</th></tr> <tr> <td>CR 09/15 AD2</td><td>44</td><td>51,5</td><td></td></tr> <tr> <td>CR 25 AD2</td><td>57</td><td>64,5</td><td></td></tr> <tr> <td>CR 37/50 AD2</td><td>77,5</td><td>85</td><td></td></tr> </table>	Part No.	A (mm)	B (mm)	* for pass-through M3 screws	CR 09/15 AD2	44	51,5		CR 25 AD2	57	64,5		CR 37/50 AD2	77,5	85	
Part No.	A (mm)	B (mm)	* for pass-through M3 screws																
CR 09/15 AD2	44	51,5																	
CR 25 AD2	57	64,5																	
CR 37/50 AD2	77,5	85																	

Enclosures	Pages
Slim enclosures sizes 49.16 and 66.16	E.14-43
Standard enclosures sizes 44.27, 57.27 and 77.27	E.48-301
HNM enclosures sizes 44.27, 57.27 and 77.27	H.74-79