
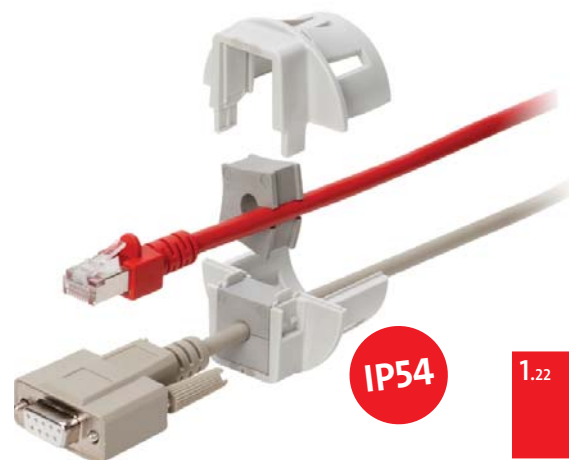


## QVT-CLICK

## Split pluggable cable glands

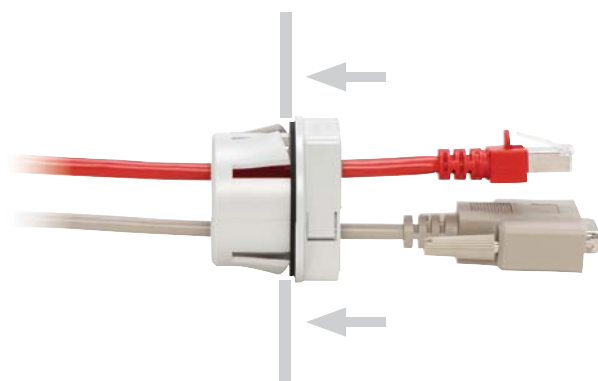

1.22


Description

Type

Order No.

Cable  
GrommetsCut-out\*  
diameter

PU




QVT-CLICK 25

45730

1 × QT

25.5 mm

10




QVT-CLICK 32

45732

1 × QT

32.5 mm

10



QVT-CLICK 40|2

45734

2 × QT

40.5mm

10



QVT-CLICK Tool

61435

Mounting tool

1

## Product description

QVT-CLICK is a circular split frame for quick and easy installation of pre-terminated cables or complete cable harnesses. The QVT-CLICK can be assembled without tools from the front side of the enclosure wall. Because of its extremely compact design, the QVT-CLICK range is especially suitable for small machines, devices and instruments. A sealing ring is included in the shipment.

The QVT-CLICK Tool for quick and easy mounting.  
Order No. 61435 (PU: 1)



## Advantages &amp; benefits

- Fast and easy mounting from the front side
- Compact design
- Routing of pre-terminated cables
- Retrofits, repairs and maintenance can be done much more easily and quickly
- Warranty on pre-terminated cables remains
- Fast and easy assembly
- For wall thickness 1.5 - 2.5 mm

## Specifications

|             |                                                               |
|-------------|---------------------------------------------------------------|
| Material    | Polycarbonate (PC)                                            |
| Colour      | grey (similar RAL 7035)                                       |
| Flame class | UL94-Vo, self-extinguishing                                   |
| IP rating   | IP54, with gasket and correct selection of the cable grommets |
| Temperature | - 30°C to + 100°C (static)                                    |
| Properties  | Halogen-free, silicone-free                                   |

## Accessories

|                   |                 |
|-------------------|-----------------|
| QT Cable grommets | 66              |
| QVT-CLICK Tool    | Order No. 61435 |
| ST Plugs          | 53              |

\*Please consider any paint layers or powder coatings!