


QT

Split cable grommets, small, single, multi and special, for the QUICK system

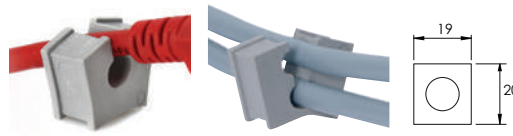

Split cable grommets QT are used with the following cable entry components:

- KEL-QUICK
- QVT
- QVT-CLICK
- KEL-QTA

They are designed for cable diameters from 1 to 15 mm. Blank grommets can seal unused grommet spaces.

When using double or quadruple grommets the cable density of cable entry frames and cable glands can be greatly increased. icotek also offers special cable grommets for e.g. ASI lines.

When installing the small grommets in multiple rows, the flat sides should be facing each other. This allows the flat sides to match up and provide a secure seal.

Advantages


- Routing of cables with and without connectors
- IP54 rating
- Greatly increased cable density when using double or quadruple grommets
- Strain relief when a suitable cable entry is selected
- Available for a wide range of cable diameters

Specifications

Material	Elastomer
Flame class	UL 94 V-0, self-extinguishing
IP rating	IP54
Temperature Properties	-40°C to +100°C (static) Halogen-free, silicone-free

Accessories

ST Plugs	85
----------	----

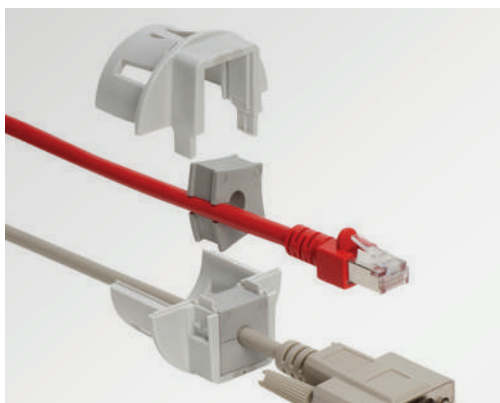

Description	Type	Compatible plugs	Order No.	Clamping range	PU
	QT 1	ST 1	42501	1 – 2 mm	10
	QT 2	ST 2	42502	2 – 3 mm	10
	QT 3	ST 3	42503	3 – 4 mm	10
	QT 4	ST 4	42504	4 – 5 mm	10
	QT 5	ST 5	42505	5 – 6 mm	10
	QT 6	ST 6	42506	6 – 7 mm	10
	QT 7	ST 7	42507	7 – 8 mm	10
	QT 8	ST 8	42508	8 – 9 mm	10
	QT 9	ST 9	42509	9 – 10 mm	10
	QT 10	ST 10	42510	10 – 11 mm	10
	QT 11	ST 11	42511	11 – 12 mm	10
	QT 12	ST 12	42512	12 – 13 mm	10
	QT 13	ST 13	42513	13 – 14 mm	10
	QT 14	ST 14	42514	14 – 15 mm	10
	QT B	–	42540	Blank grommet	10
	QT 2 x				
	QT 2 3	ST 3	42566	2× Ø 3 mm	10
	QT 2 4	ST 4	42568	2× Ø 4 mm	10
	QT 2 5	ST 5	42570	2× Ø 5 mm	10
	QT 2 5.5	–	42571	2× Ø 5.5 mm	10
	QT 2 6	ST 6	42572	2× Ø 6 mm	10
	QT 2 6.5	–	42576	2× Ø 6.5 mm	10
	QT 2 7	ST 7	42578	2× Ø 7 mm	10
	QT 4 x				
	QT 4 3	ST 3	42580	4× Ø 3 mm	10
	QT 4 4	ST 4	42582	4× Ø 4 mm	10
	QT 4 4.5	–	42583	4× Ø 4.5 mm	10
	QT 4 5	ST 5	42584	4× Ø 5 mm	10
	QT 4 5.5	–	42585	4× Ø 5.5 mm	10
	QT 4 6	ST 6	42586	4× Ø 6 mm	10
	QT-ASI 1	–	42573	1× ASI-cable	10
	QT-ASI 2	–	42574	2× ASI-cable	10
	QT tele	–	42575	Telephone cable	10